

# MARION COUNTY SURVEYOR'S OFFICE




## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 25 TWN. 15<sub>N</sub> RNG. 4<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 9-25-09  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: no point set  
Method of Establishment: County: 11-20-1987  
IN S.P.C. E Zone, NAD 83  
Name: 15042506  
N: 496 250.504 1(m)  
E: 69 225.670 0(m)

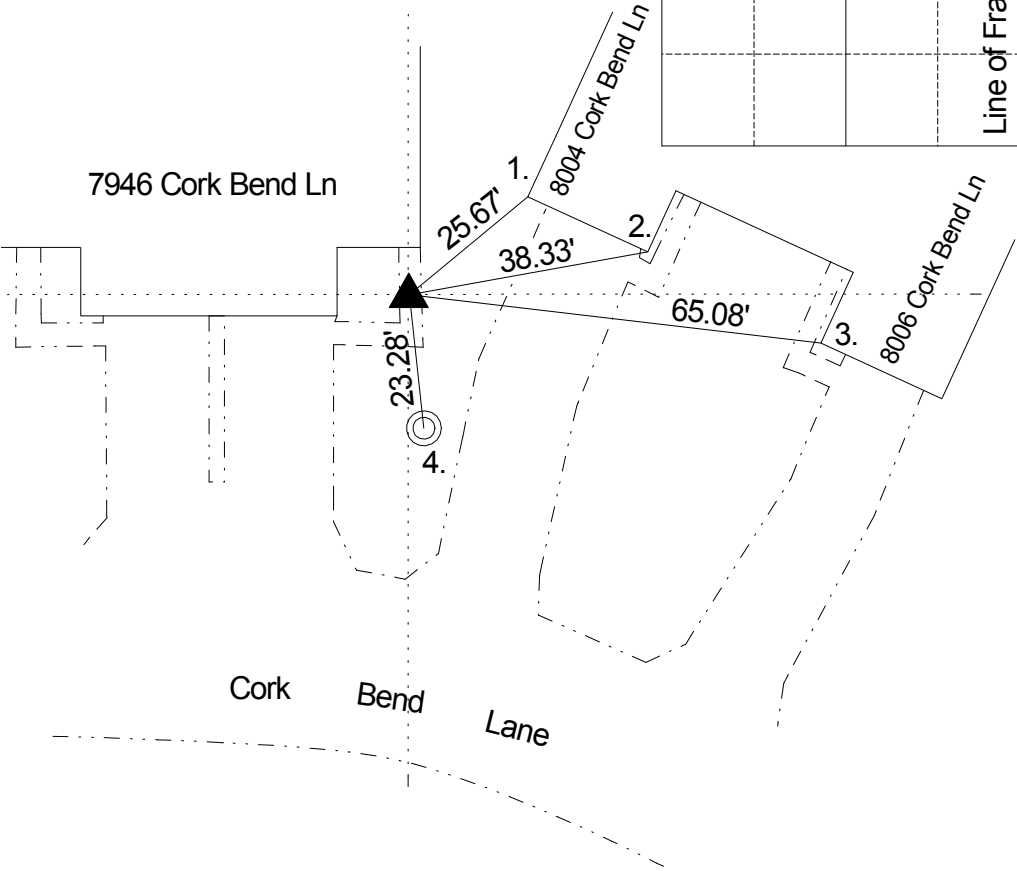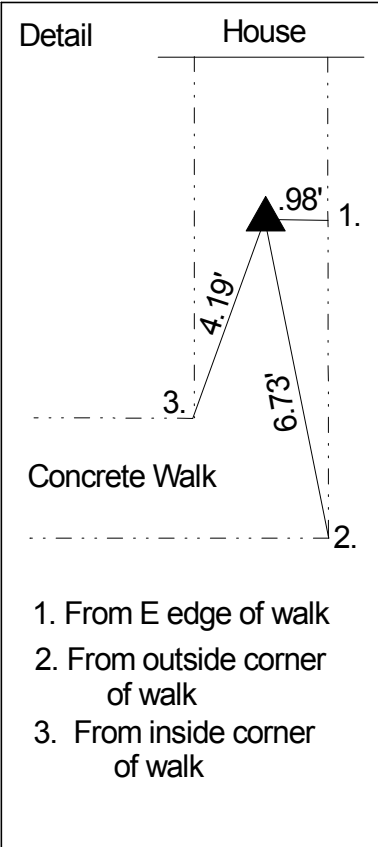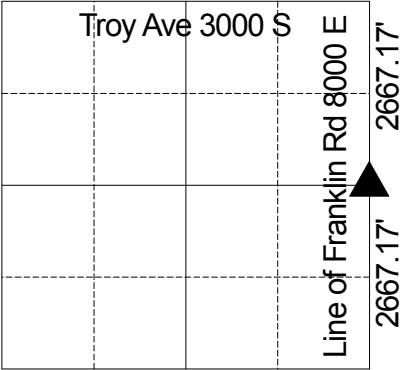

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 18" beech bearing an unknown degree W 23 links and an 18" beech bearing S 46 E 21 links (Marion County Atlas p. 10). Corner was set on 11/13/1987 by Wilcoxen as a # 205 cast iron Harrison monument 18" below surface. Corner was established by setting it half way on line with the northeast and southeast corners and the landowner, Emil Moeller, whose family has owned the property since the 1850's statement that no monument had ever existed there. Corner referenced by Wilcoxen on 8/19/2004 and called a rebar set (Harrison monument destroyed by subdivision going in). Corner referenced by Wilcoxen on 8/25/2009 and no monument was found. No marker was set as corner falls on homeowner's front walk.

REF.	DISTANCE	DESCRIPTION
1.	25.67'	Westerly corner of brick garage 8004 Cork Bend Ln
2.	38.33'	Easterly corner of brick garage 8004 Cork Bend Ln
3.	65.08'	Westerly corner of brick garage 8006 Cork Bend Ln
4.	23.28'	Cut 'x' in center of sewer manhole

Note: Corner lies in Moeller Estates at Wildwood Farm Sec 4